


WAJADTUHA
electronics



Wajadtuha Infrared GSTL-I3

Manufacture

Smart Software

Easy to operate

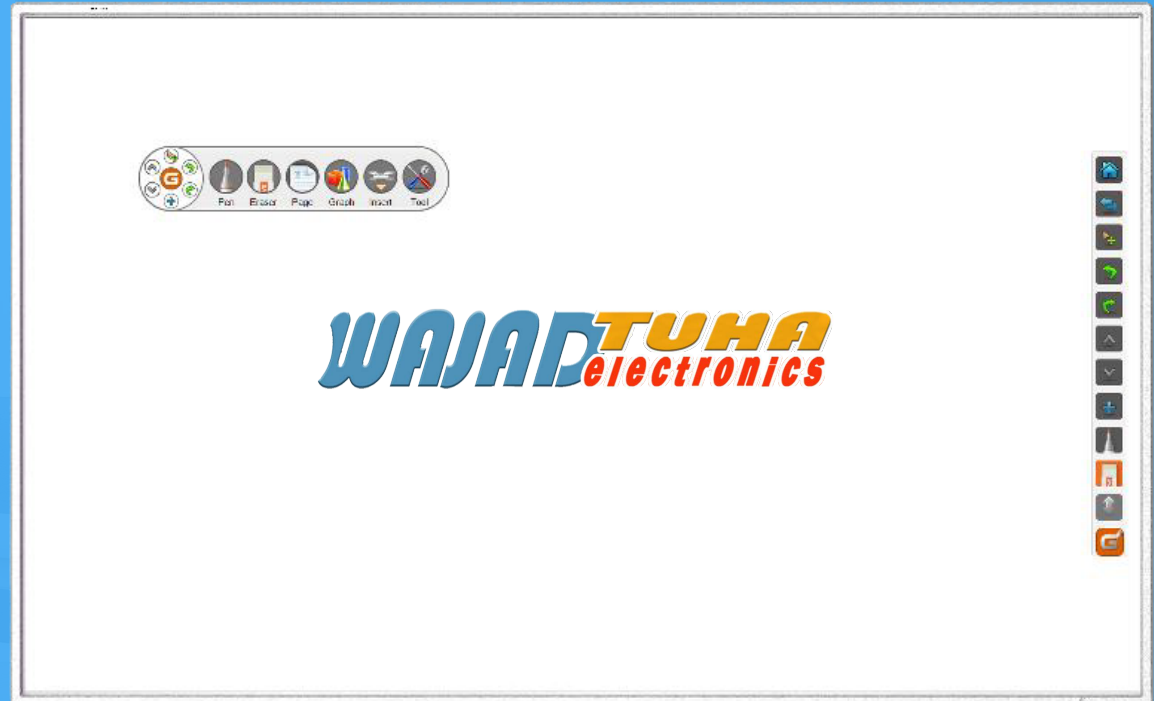


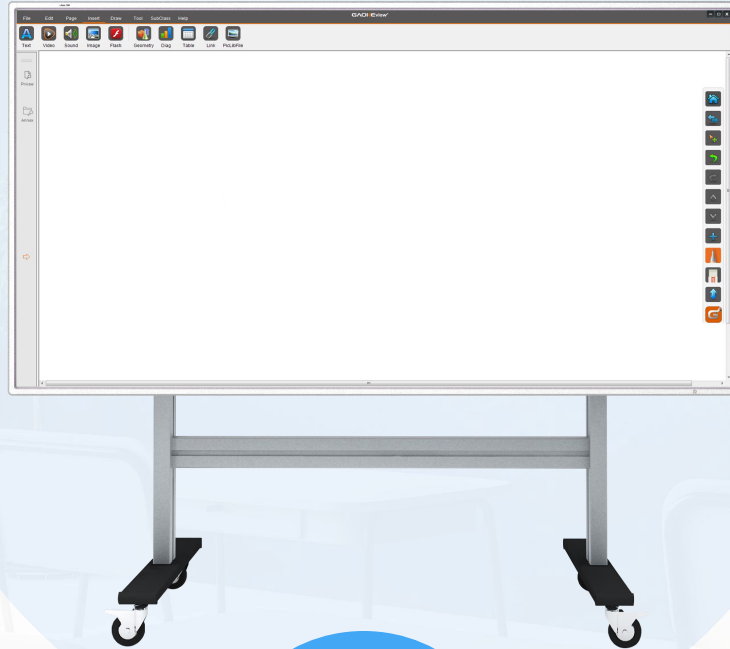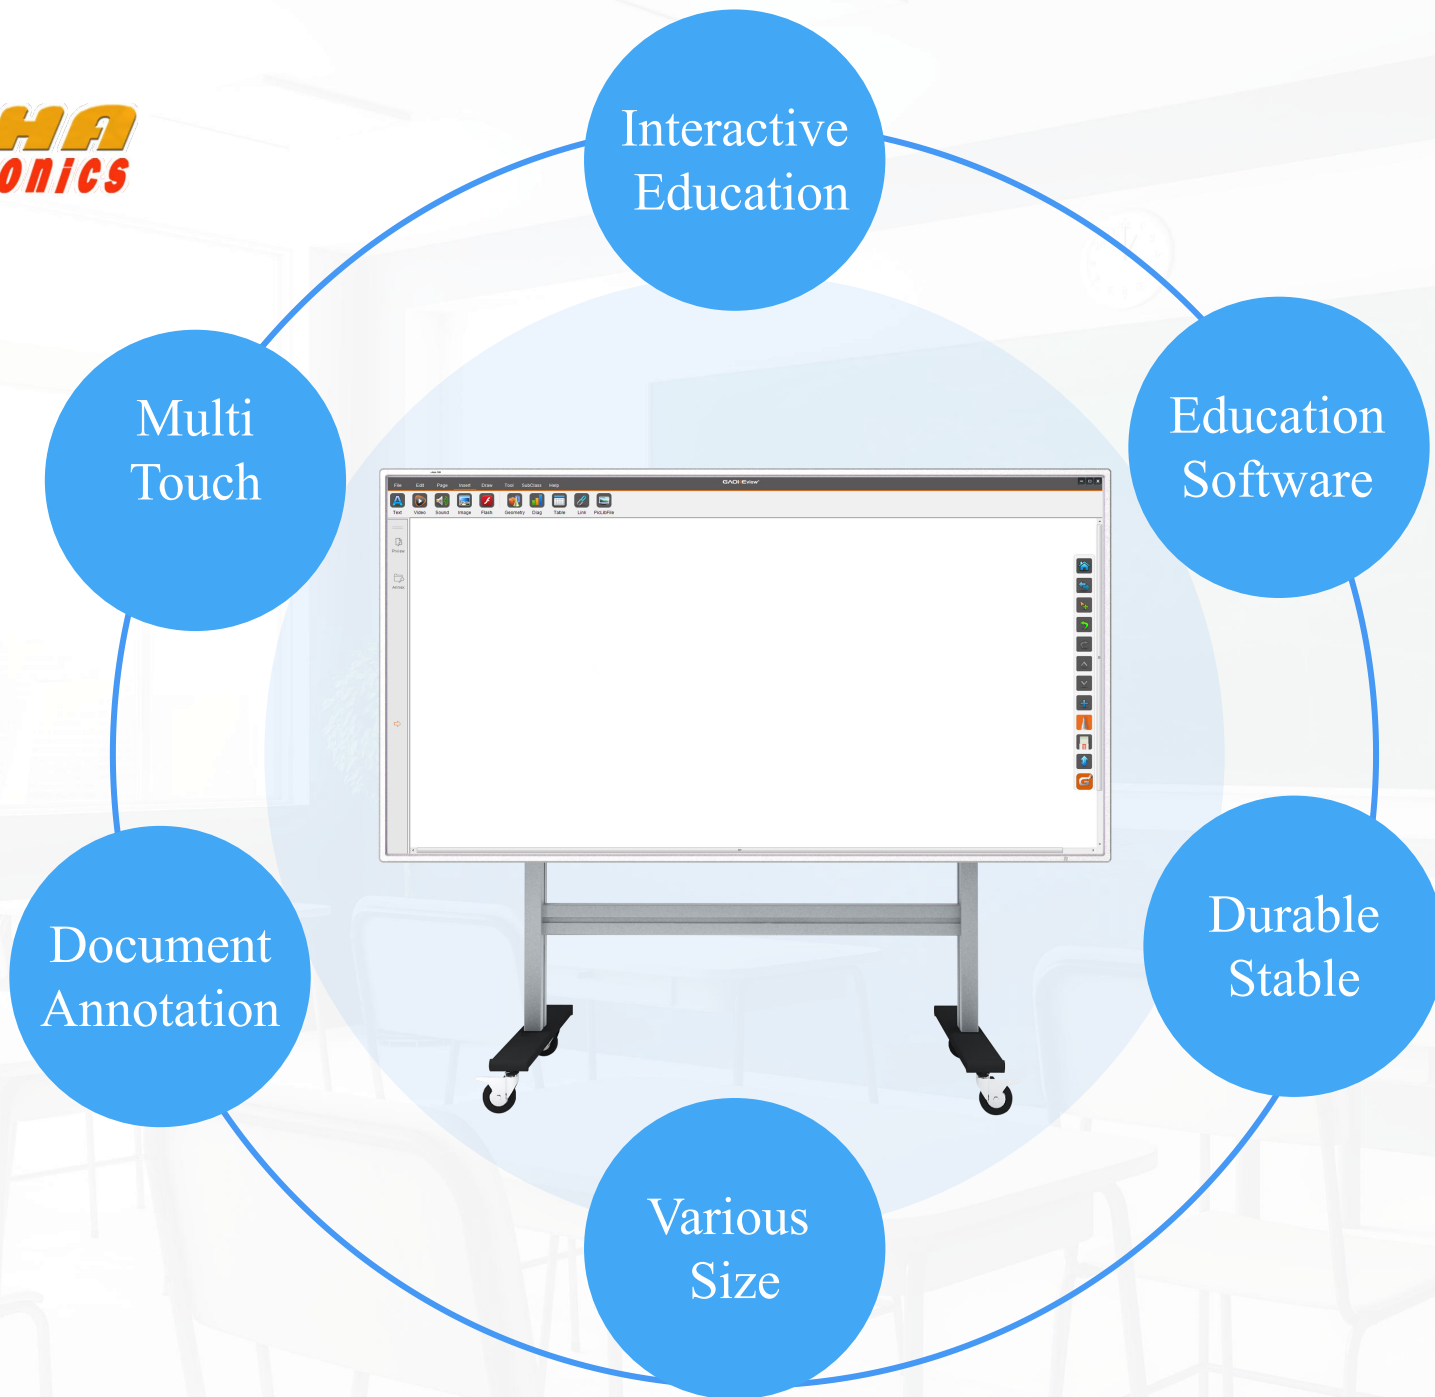

How to realize multimedia interactive teaching?



Wajadtuha Infrared Interactive GSTL-I3

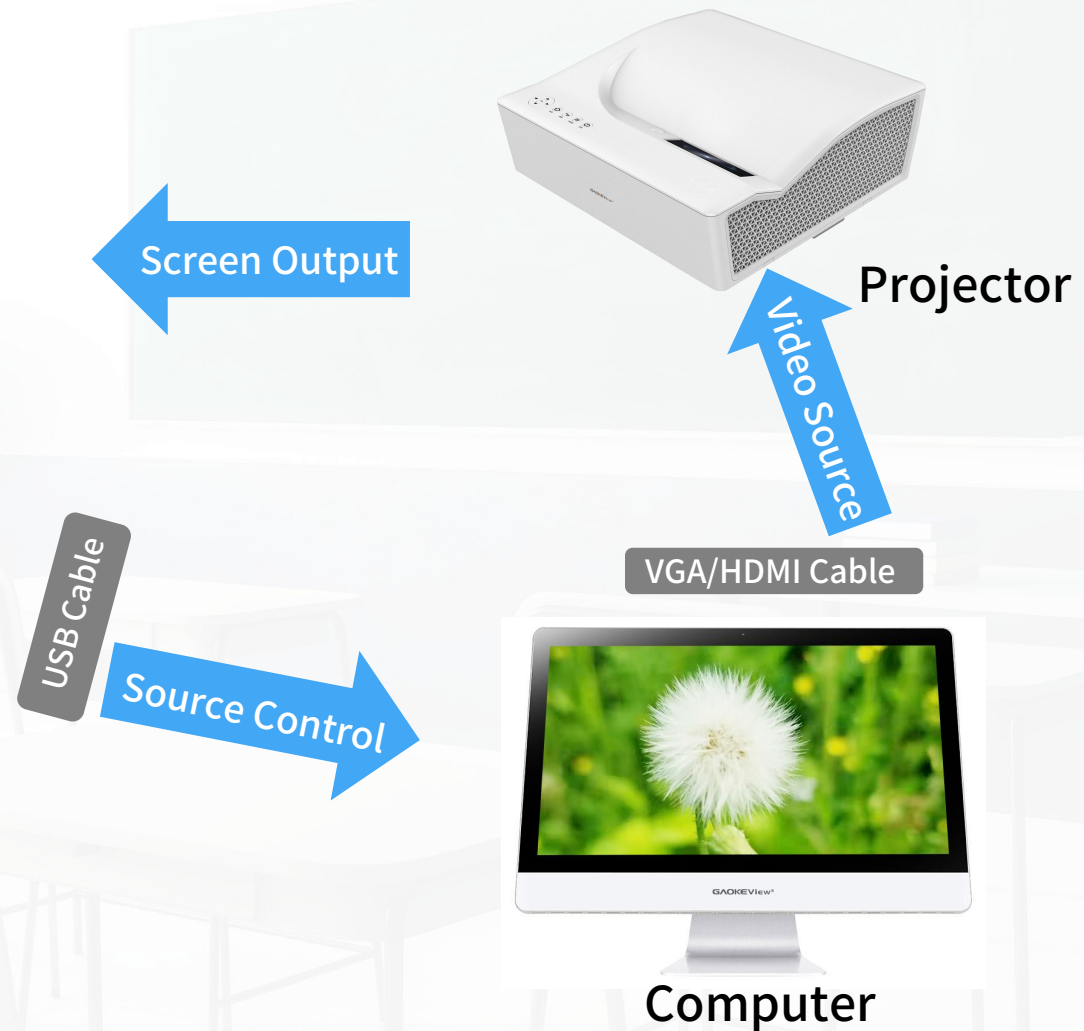

Multi-touch Support multiplayer touch writing
To realize interaction in class

32768 × 32768 resolution, smooth writing,
multiple participants perform various
operations on the GSTL-I3




Bright and clear picture
Suitable for various environment

Bright picture quality which can reduce the
impact of ambient light on the projection display
Suitable for different light environments, which
is conducive to the quality of teaching



No shortcut key design
Beautiful and generous

Drop the shortcut keys on both sides, increase the area of the projector, and write smoothly

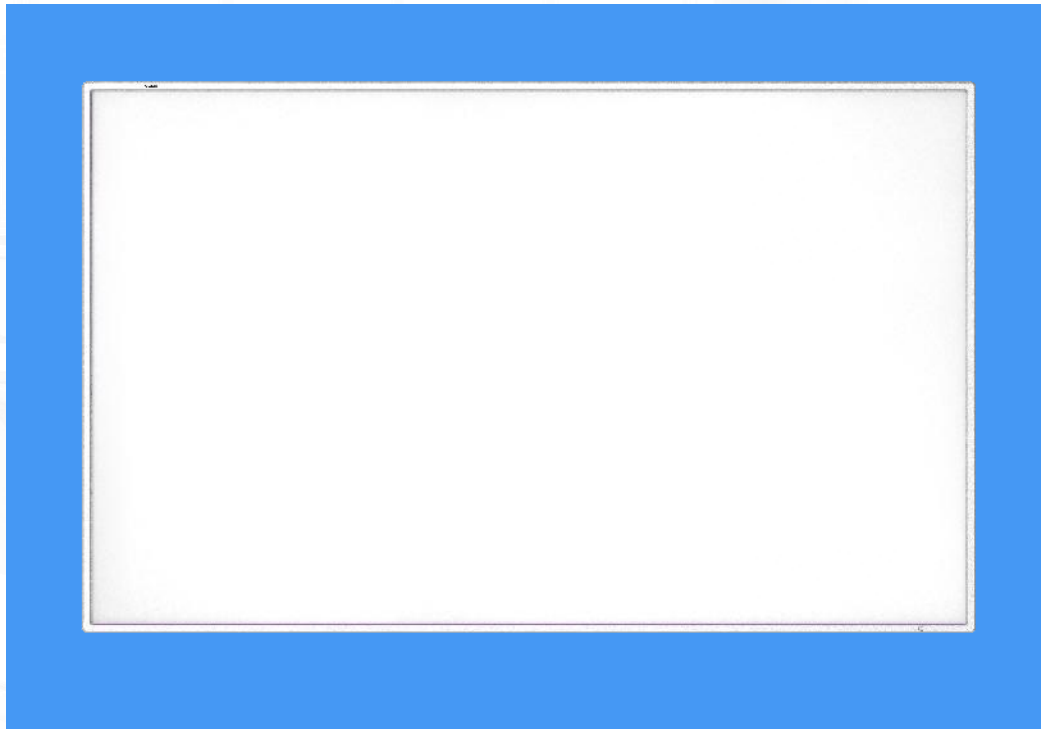

Curved border
Safe, reliable and durable GSTL-I3


frame adopts arc design, anti-scratch and anti-collision, safe and reliable, easy to maintain








Integration with GSTL-I3 software which is more convenient for teaching

With Wajadtuha GSTL-I3 software which includes rich teaching tools, it helps teachers to quickly produce interactive courseware for teaching scenes

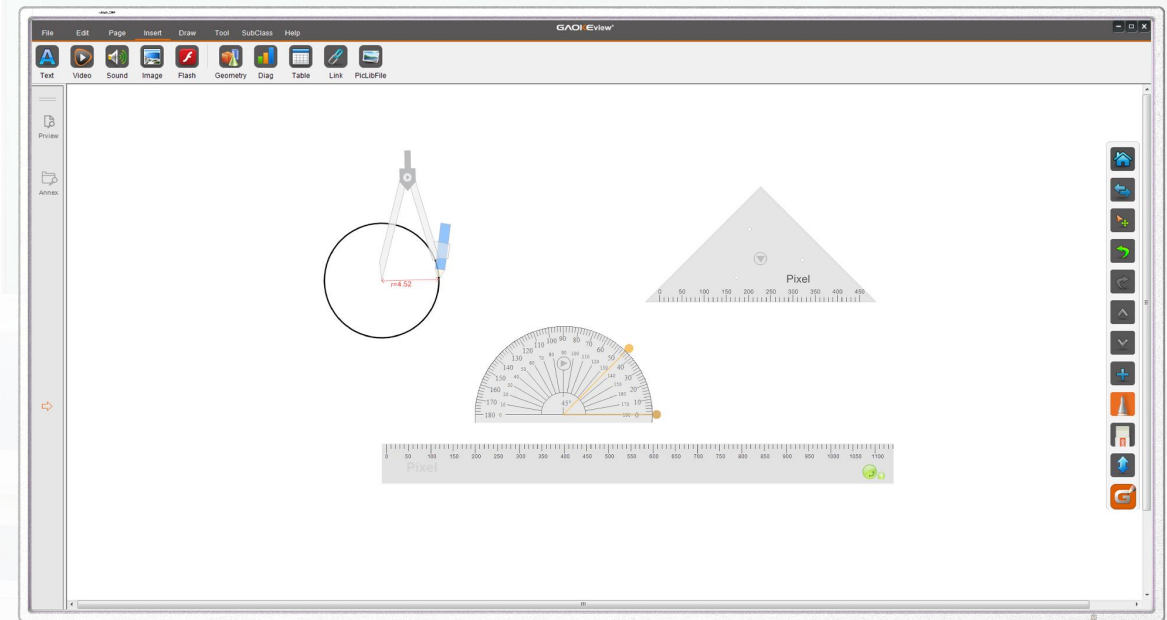

Rich teaching resources
to increase teaching quality

ALF Software, to make the teaching
more interesting

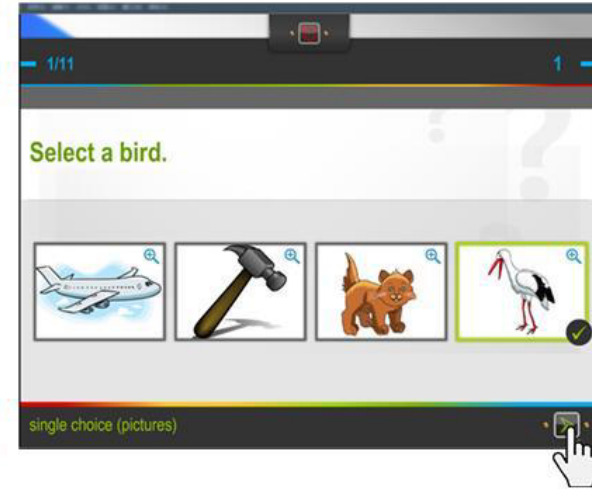
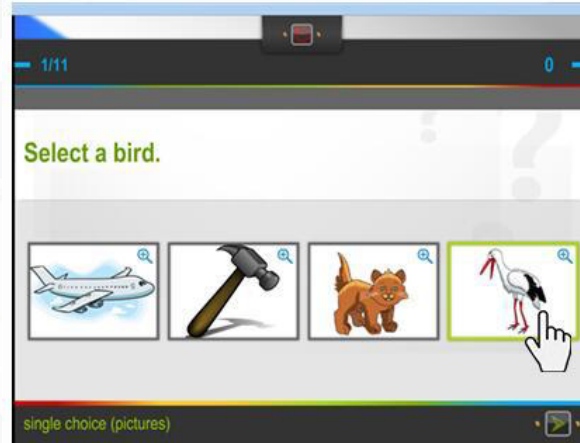
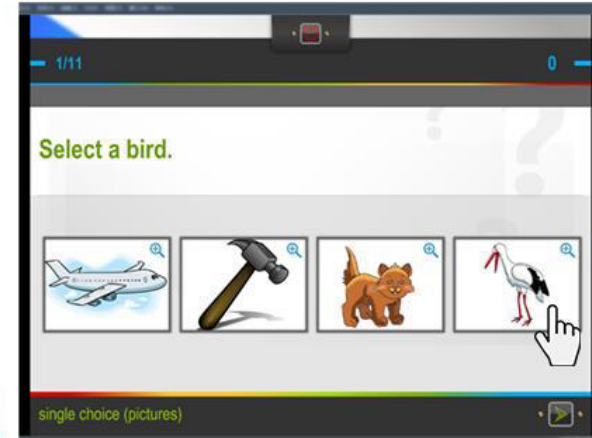


ALF Software




Model	GSTL-I3-89S	GSTL-I3-100S
Induction way	Indrared induction	
Size	89 inch	103 inch
Aspect ratio	16:10	16:9
Working area(mm)	1865×1160	2213×1245
Product size(mm)	1917×1221×30	2274×1306×30

Technology Specification

Surface material	Using macromolecule anti-glare panel material and optimized for projection		
Writing ways	Pen,finger,pointer or other object	Precision	<1mm
Back plate	Metal plate material	Resolution	32768x32768
Frame material	Aluminum	Power supply	USB only
Anti-light intensity	Support working under sunlight	Consumption	<1W
Modular design	Drawable PCB and replace easily	Driver mode	Free driver, plug and play
Connecting	USB cable	Working temps	-15-55°C
Supported OS	Win8/Win7/Vista/XP/2003/2000/Me/98/Linux/Mac OX	Working humidity	10%-95%
Cursor speed	250points/Sec	Mark pen	Support
USB cable length	5m	Installation	Wall mounted or mobile stand

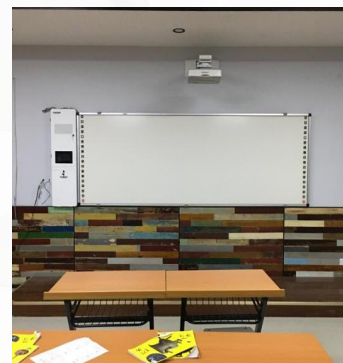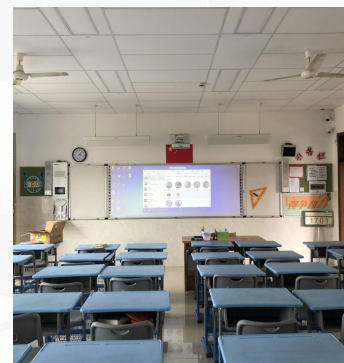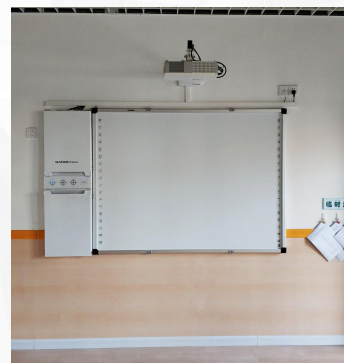

WAJADTUHA electronics

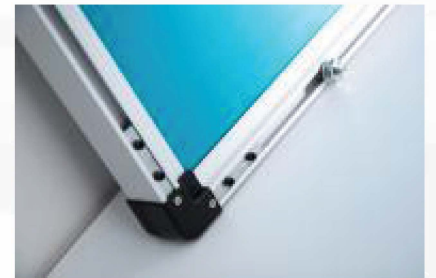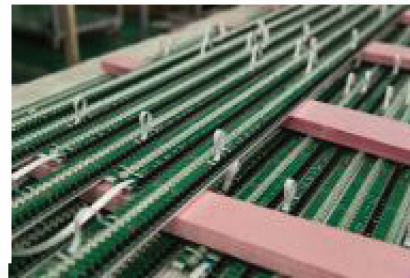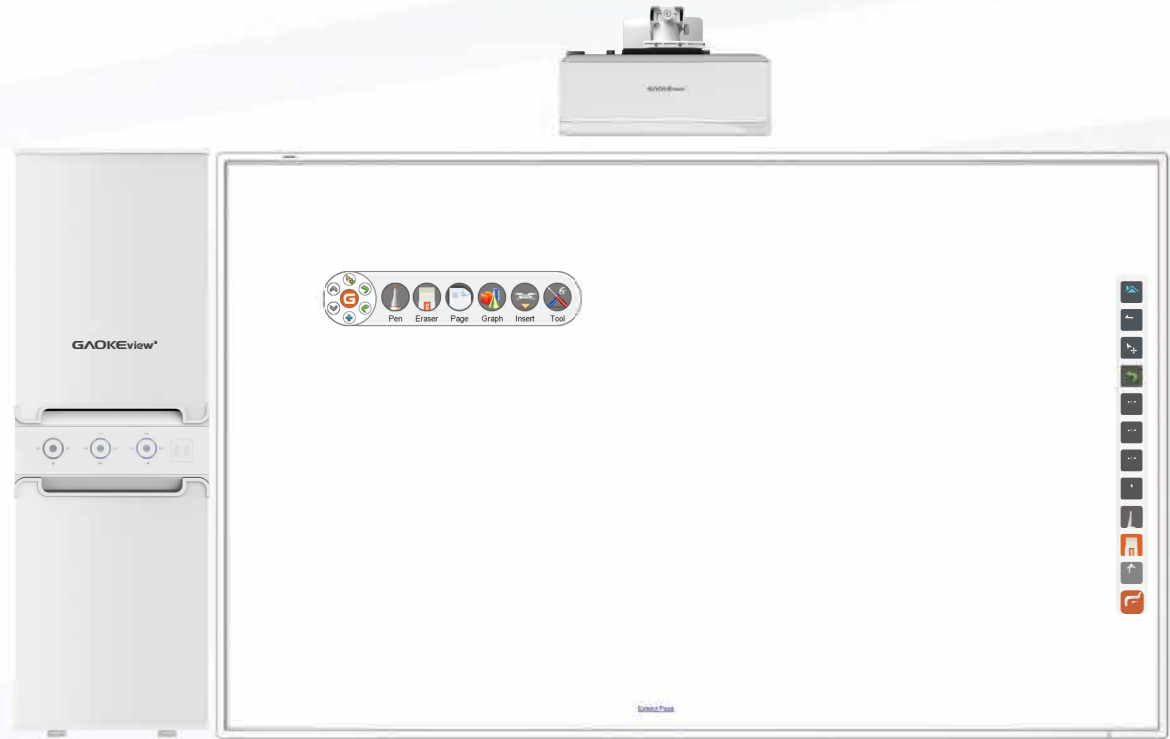

CONTACT

Global Security Technology LLC
Office 609, Business Center
Al Khuwair, Muscat, Oman
Ph: +968 24480700
Fax: +986 24481811
Email: info@leamratech.com



www.leamratech.com
www.wajadtuha.com

WAJADTUHA
electronics